



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
10/823,298	04/12/2004	Liping Ren	IR-2390 (2-3	4746
2352	7590	06/01/2005	EXAMINER	
OSTROLENK FABER GERB & SOFFEN 1180 AVENUE OF THE AMERICAS NEW YORK, NY 100368403			PIZARRO CRESPO, MARCOS D	
			ART UNIT	PAPER NUMBER
			2814	

DATE MAILED: 06/01/2005

Please find below and/or attached an Office communication concerning this application or proceeding.

EL

Office Action Summary	Application No.	Applicant(s)	
	10/823,298	REN, LIPING	
	Examiner	Art Unit	
	Marcos D. Pizarro-Crespo	2814	

-- The MAILING DATE of this communication appears on the cover sheet with the correspondence address --

Period for Reply

A SHORTENED STATUTORY PERIOD FOR REPLY IS SET TO EXPIRE 3 MONTH(S) FROM THE MAILING DATE OF THIS COMMUNICATION.

- Extensions of time may be available under the provisions of 37 CFR 1.136(a). In no event, however, may a reply be timely filed after SIX (6) MONTHS from the mailing date of this communication.
- If the period for reply specified above is less than thirty (30) days, a reply within the statutory minimum of thirty (30) days will be considered timely.
- If NO period for reply is specified above, the maximum statutory period will apply and will expire SIX (6) MONTHS from the mailing date of this communication.
- Failure to reply within the set or extended period for reply will, by statute, cause the application to become ABANDONED (35 U.S.C. § 133). Any reply received by the Office later than three months after the mailing date of this communication, even if timely filed, may reduce any earned patent term adjustment. See 37 CFR 1.704(b).

Status

- 1) ☒ Responsive to communication(s) filed on 12 April 2004.
- 2a) ☐ This action is **FINAL**. 2b) ☒ This action is non-final.
- 3) ☐ Since this application is in condition for allowance except for formal matters, prosecution as to the merits is closed in accordance with the practice under *Ex parte Quayle*, 1935 C.D. 11, 453 O.G. 213.

Disposition of Claims

- 4) ☒ Claim(s) 1-29 is/are pending in the application.
- 4a) Of the above claim(s) _____ is/are withdrawn from consideration.
- 5) ☐ Claim(s) _____ is/are allowed.
- 6) ☒ Claim(s) 1-29 is/are rejected.
- 7) ☐ Claim(s) _____ is/are objected to.
- 8) ☐ Claim(s) _____ are subject to restriction and/or election requirement.

Application Papers

- 9) ☐ The specification is objected to by the Examiner.
- 10) ☐ The drawing(s) filed on _____ is/are: a) ☐ accepted or b) ☐ objected to by the Examiner.
 Applicant may not request that any objection to the drawing(s) be held in abeyance. See 37 CFR 1.85(a).
 Replacement drawing sheet(s) including the correction is required if the drawing(s) is objected to. See 37 CFR 1.121(d).
- 11) ☐ The oath or declaration is objected to by the Examiner. Note the attached Office Action or form PTO-152.

Priority under 35 U.S.C. § 119

- 12) ☐ Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f).
- a) ☐ All b) ☐ Some * c) ☐ None of:
1. ☐ Certified copies of the priority documents have been received.
2. ☐ Certified copies of the priority documents have been received in Application No. _____.
3. ☐ Copies of the certified copies of the priority documents have been received in this National Stage application from the International Bureau (PCT Rule 17.2(a)).
- * See the attached detailed Office action for a list of the certified copies not received.

Attachment(s)

- | | |
|--|---|
| 1) <input checked="" type="checkbox"/> Notice of References Cited (PTO-892) | 4) <input type="checkbox"/> Interview Summary (PTO-413)
Paper No(s)/Mail Date. _____ |
| 2) <input type="checkbox"/> Notice of Draftsperson's Patent Drawing Review (PTO-948) | 5) <input type="checkbox"/> Notice of Informal Patent Application (PTO-152) |
| 3) <input checked="" type="checkbox"/> Information Disclosure Statement(s) (PTO-1449 or PTO/SB/08)
Paper No(s)/Mail Date <u>4/12/2004</u> . | 6) <input checked="" type="checkbox"/> Other: <u>figure 19 of U.S. 6,740,952</u> . |

Art Unit: 2814

Attorney's Docket Number: IR-2390 (2-3965)

Filing Date: 4/12/2004

Claimed Priority Date: 4/11/2003 (Provisional 60/462,562)

Applicant(s): Ren

Examiner: Marcos D. Pizarro-Crespo

DETAILED ACTION

This Office action responds to application ser. No. 10/823,298 filed on 4/12/2004.

Claim Rejections - 35 USC § 102

1. The following is a quotation of the appropriate paragraphs of 35 U.S.C. 102 that form the basis for the rejections under this section made in this Office action:

A person shall be entitled to a patent unless –

(e) the invention was described in (1) an application for patent, published under section 122(b), by another filed in the United States before the invention by the applicant for patent or (2) a patent granted on an application for patent by another filed in the United States before the invention by the applicant for patent, except that an international application filed under the treaty defined in section 351(a) shall have the effects for purposes of this subsection of an application filed in the United States only if the international application designated the United States and was published under Article 21(2) of such treaty in the English language.

2. Claims 25, 26, 28, and 29 are rejected under 35 U.S.C. 102(e) as being anticipated by Fujishima (US 6740952).
3. Regarding claim 25, Fujishima shows (see, e.g., fig. 19) all aspects of the instant invention including a field plate structure comprising:
 - ✓ A first field plate **9**
 - ✓ A second field plate **FP1** disposed above and spaced from the first field plate
 - ✓ A third field plate **FP2** disposed above and spaced from the second field plate
4. Regarding claim 26, Fujishima shows (see, e.g., attached fig. 19):

- ✓ The second field plate **FP1** including:
 - a first portion
 - a second portion
 - a first gap separating the portions
 - ✓ The third plate **FP2** including:
 - a first portion
 - a second portion
 - a second gap **Wg** separating the portions
 - ✓ The first gap being wider than the second gap **Wg**
5. Regarding claim 28, Fujishima shows (see, e.g., fig. 19):
- ✓ The first portion of the second plate **FP1** is electrically connected to the first plate **9**
 - ✓ The second portion of the second plate **FP1** is electrically connected to the second portion of the third plate **FP2**
6. Regarding claim 29, Fujishima shows (see, e.g., fig. 19):
- ✓ The first plate is insulated from the second plate **FP1** by an insulation layer **10**
 - ✓ The second plate **FP1** is insulated from the third plate **FP2** by another insulation layer **25**

Claim Rejections - 35 USC § 103

7. The following is a quotation of 35 U.S.C. 103(a) which forms the basis for all obviousness rejections set forth in this Office action:

Art Unit: 2814

(a) A patent may not be obtained though the invention is not identically disclosed or described as set forth in section 102 of this title, if the differences between the subject matter sought to be patented and the prior art are such that the subject matter as a whole would have been obvious at the time the invention was made to a person having ordinary skill in the art to which said subject matter pertains. Patentability shall not be negated by the manner in which the invention was made.

8. Claims 1-13 and 24 are rejected under 35 U.S.C. 103(a) as being unpatentable over Fujishima in view of Van Zant and Ghandhi.

9. Regarding claim 1, Fujishima shows (see, e.g., fig. 19) most aspects of the instant invention including a semiconductor device comprising:

- ✓ A semiconductor substrate **1** of a first conductivity type
- ✓ A semiconductor layer of a second conductivity type formed over the substrate **1**
- ✓ A body region **2** of the first conductivity formed in the semiconductor layer
- ✓ An invertible channel in the body region **2**
- ✓ A source region **3** of the second conductivity type formed in the body region **2** and adjacent to the channel
- ✓ A gate structure formed over the channel region including:
 - a gate electrode **9**
 - a gate insulation layer **7** spacing the gate electrode **9** from the channel
- ✓ A drain region **6** formed in the semiconductor layer
- ✓ A drift region **5** in the semiconductor layer spacing the body region **2** from the drain region **6**
- ✓ A field plate structure disposed over the drift region **5** including:
 - a first insulation layer **8** of a first thickness

- a second insulation layer **10** of a second thickness formed over the first insulation layer **8**
- a third insulation layer **25** of a third thickness
- a first plate **9** disposed over the first insulation layer **8**
- a second plate **FP1** disposed over the second insulation layer **8**
- a third plate **FP2** spaced from the second plate **FP1** by the third insulation layer **25**

Fujishima, however, fails to show the semiconductor layer is epitaxially formed. Van Zant (see, e.g., pp.382), on the other hand, teaches that epitaxially forming Fujishima's semiconductor layer would allow to accurately controlling the doping concentrations of the layer. Ghandhi (see, e.g., pp.258) teaches that epitaxially forming Fujishima's semiconductor layer on the substrate would eliminate the problems of compatibility or mismatch between the layer and the substrate.

It would have been obvious at the time of the invention to one of ordinary skill in the art to epitaxially form Fujishima's semiconductor layer, as suggested by Van Zant and Ghandhi, to eliminate the problems of compatibility between the layer and the substrate and to accurately control the doping concentrations of the layer.

10. Regarding claims 2, 4, and 6, Fujishima shows the first **8**, second **10** and third **25** insulation layers comprising an oxide (see, e.g., fig. 19)

11. Regarding claim 3, Fujishima shows the first thickness is 0.6 microns (see, e.g., col.36/ll.20) but fails to specify the claimed thickness of 0.4 microns. However, differences in thickness will not support the patentability of subject matter encompassed

Art Unit: 2814

by the prior art unless there is evidence indicating such thickness is critical. "Where the general conditions of a claim are disclosed in the prior art, it is not inventive to discover the workable ranges by routine experimentation". *In re Aller*, 220 F.2d 454,456,105 USPQ 233, 235 (CCPA 1955).

Fujishima also teaches that the first thickness, as well as the other thickness of the different insulation layers, affects the performance and the area of the device (see, e.g., col.37/ll.15-29, col.8/ll.36-40, and col.39/ll.17-31). Therefore, it is necessary to ensure that the insulation layers are of an appropriate thickness (see, e.g., Fujishima/col.35/ll.60-62). The specific claimed first thickness, *i.e.*, 0.4 microns, absent any criticality, is only considered to be the "optimum" thickness disclosed by Fujishima that a person having ordinary skill in the art would have been able to determine using routine experimentation based, among other things, on the desired device performance, manufacturing costs, etc. (see Boesch, 205 USPQ 215 (CCPA 1980)), and since neither non-obvious nor unexpected results, *i.e.*, results which are different in kind and not in degree from the results of the prior art, will be obtained as long as the first thickness provides for a stable performance of the device, as already suggested by Fujishima.

Since the applicant has not established the criticality (see next paragraph) of the claimed thickness of 0.4 microns, it would have been obvious to one of ordinary skill in the art to use these values in the device of Fujishima.

CRITICALITY

12. The specification contains no disclosure of either the critical nature of the claimed thickness or any unexpected results arising therefrom. Where patentability is said to be based upon particular chosen dimensions or upon another variable recited in a claim, the applicant must show that the chosen dimensions are critical. *In re Woodruff*, 919 F.2d 1575, 1578, 16 USPQ2d 1934, 1936 (Fed. Cir. 1990).

13. Regarding claim 4, Fujishima shows the second insulation layer **10** comprising an oxide (see, e.g., fig. 19).

14. Regarding claim 5, Fujishima shows the second thickness is 1.3 microns (see, e.g., col.39/ll.5).

15. Regarding claim 7, Fujishima shows the third thickness is 2.5 microns (see, e.g., col.39/ll.7) instead of the claimed thickness of 1.4 microns. See also the comments stated above in paragraphs 11 and 12 with respect to the differences between the claimed thickness and that of the prior art, which are considered repeated here.

16. Regarding claim 8, Fujishima shows the first field plate **9** extending from the gate electrode (see, e.g., fig. 19)

17. Regarding claim 9, Fujishima shows that the first field plate **9** comprises gate electrode material (see, e.g., col.39/ll.9-10). Van Zant (see, e.g., pp. 511), on the other hand, teaches that doped polysilicon is the standard gate electrode material for Fujishima's device.

18. Regarding claim 10, Fujishima shows (see, e.g., fig. 19) the second field plate **FP1** comprising a first portion and a second portion, wherein a gap separates the portions.

19. Regarding claim 11, Fujishima shows that the gap between the portions of the second field plate **FP1** is 45 microns (see, e.g., col.37/ll.29-34 and col.39/ll.13-16).

20. Regarding claims 12 and 13, Fujishima shows the third field plate **FP2** comprising a first portion and a second portion (see, e.g., fig. 19), wherein a gap of 25 microns separates the portions (see, e.g., col.37/ll.32).

21. Regarding claim 24, Fujishima shows a resurf region **20** of the first conductivity type formed in the drift region **5** below the field plate structure (see, e.g., fig. 15).

22. Claims 14-23 are rejected under 35 U.S.C. 103(a) as being unpatentable over Fujishima/Van Zant/Ghandhi in view of Noda (US 6617652) and Ranjan (US 5801431).

23. Regarding claim 14, Fujishima/Van Zant/Ghandhi shows most aspects of the instant invention (see, e.g., paragraph 9 above). Fujishima also shows the second plate **FP1** including a first portion and a second portion, wherein a gap separates the portions (see, e.g., fig. 19). He, however, fails to specify the portions to be annular portions disposed around the drain region **6**. Noda, on the other hand, teaches (see, e.g., fig. 1) that annular plates formed concentrically around the drain diffusion region of Fujishima would improve the breakdown properties of the device (see, e.g., Noda/col.14/ll.20-22). Ranjan elaborates by teaching that the series of plates in Noda reduce the tendency to concentrate high electric fields near the surface of the device thereby improving its breakdown voltage (see, e.g., Ranjan/col.5/ll.52-56).

It would have been obvious at the time of the invention to one of ordinary skill in the art to form the first and second portions of the second plate of Fujishima/Van Zant/Ghandhi as annular portions disposed around the drain region, as suggested by Noda and Ranjan, to improve the breakdown voltage properties of the device.

24. Regarding claim 15, Fujishima shows that the gap between the portions of the second field plate **FP1** is 45 microns (see, e.g., col.37/ll.29-34 and col.39/ll.13-16).

25. Regarding claim 16, Fujishima (see, e.g., fig. 19) shows the third plate including a first portion and a second portion, wherein a gap separates the portions. He,

Art Unit: 2814

however, fails to specify the portions to be annular portions disposed around the drain region. Noda, on the other hand, teaches (see, e.g., fig. 1) that annular plates formed concentrically around the drain diffusion region of Fujishima would improve the breakdown properties of the device (see, e.g., Noda/col.14/ll.20-22). Ranjan elaborates by teaching that the series of plates in Noda reduce the tendency to concentrate high electric fields near the surface of the device thereby improving its breakdown voltage (see, e.g., col.5/ll.52-56).

It would have been obvious at the time of the invention to one of ordinary skill in the art to form the first and second portions of the third plate of Fujishima/Van Zant/Ghandhi as annular portions disposed around the drain region, as suggested by Noda and Ranjan, to improve the breakdown voltage properties of the device.

26. Regarding claim 17, Fujishima shows the gap between the portions is 25 microns (see, e.g., col.37/ll.32).

27. Regarding claim 18, Fujishima/Van Zant/Ghandhi shows most aspects of the instant invention (see, e.g., paragraph 9 above).

Fujishima also shows:

✓ The second plate **FP1** including (see, e.g., fig. 19):

- a first portion
- a second portion
- a first gap separating the portions

✓ The third plate **FP2** including (see, e.g., fig. 19):

- a first portion

- a second portion
 - a second gap **Wg** separating the portions
- ✓ The first gap being wider than the second gap **Wg** (see, e.g., fig. 19)

Fujishima, however, fails to specify the portions to be annular portions disposed around the drain region. Noda, on the other hand, teaches (see, e.g., fig. 1) that annular plates formed concentrically around the drain diffusion region of Fujishima would improve the breakdown properties of the device (see, e.g., Noda/col.14/ll.20-22). Ranjan elaborates by teaching that the series of plates in Noda reduce the tendency to concentrate high electric fields near the surface of the device thereby improving its breakdown voltage (see, e.g., Ranjan/col.5/ll.52-56).

It would have been obvious at the time of the invention to one of ordinary skill in the art to form the plate portions of Fujishima/Van Zant/Ghandhi as annular portions disposed around the drain region, as suggested by Noda and Ranjan, to improve the breakdown voltage properties of the device.

28. Regarding claim 19, Fujishima shows that when the first gap is 25 microns, the second gap is 48 microns (see, e.g., fig. 19, col.37/ll.32, and col.39/ll.13-16), instead of the claimed second gap of 45 microns. See also the comments stated above in paragraphs 11 and 12 with respect to the differences between the claimed dimensions and those of the prior art, which are considered repeated here.

29. Regarding claim 20, Fujishima shows the first plate **9** terminating below the first portion of the second plate **FP1** (see, e.g., fig. 19).

Art Unit: 2814

30. Regarding claim 21, Fujishima shows the second portion of the second field plate **FP1** is electrically connected to the drain region **6** and to the second portion of the third plate **FP2** (see, e.g., fig. 19).

31. Regarding claim 22, Fujishima shows the first portion of the second plate **FP1** is electrically connected to the first plate **9** (see, e.g., fig. 19).

32. Regarding claim 23, Fujishima shows the first portion of the third plate **FP2** is electrically connected to the source region **3** (see, e.g., fig. 19).

33. Claim 27 is rejected under 35 U.S.C. 103(a) as being unpatentable over Fujishima in view of Noda and Ranjan.

34. Regarding claim 27, Fujishima shows most aspects of the instant invention (see, e.g., paragraphs 3 and 4 above), except for the portions being annular. Noda, on the other hand, teaches (see, e.g., fig. 1) that annular plates formed concentrically around the drain diffusion region of Fujishima would improve the breakdown properties of the device (see, e.g., Noda/col.14/ll.20-22). Ranjan elaborates by teaching that the plate portions in Noda reduce the tendency to concentrate high electric fields near the surface of the device thereby improving its breakdown voltage (see, e.g., Ranjan/col.5/ll.52-56).

It would have been obvious at the time of the invention to one of ordinary skill in the art to form the plate portions of Fujishima as annular portions, as suggested by Noda and Ranjan, to improve the breakdown voltage properties of the device.

Conclusion

35. Papers related to this application may be submitted directly to Art Unit 2814 by facsimile transmission. Papers should be faxed to Art Unit 2814 via the Art Unit 2814

Art Unit: 2814

Fax Center. The faxing of such papers must conform to the notice published in the Official Gazette, 1096 OG 30 (15 November 1989). The Art Unit 2814 Fax Center number is **(703) 872-9306**. The Art Unit 2814 Fax Center is to be used only for papers related to Art Unit 2814 applications.


36. Any inquiry concerning this communication or earlier communications from the examiner should be directed to **Marcos D. Pizarro-Crespo** at **(571) 272-1716** and between the hours of 9:30 AM to 8:00 PM (Eastern Standard Time) Monday through Thursday or by e-mail via Marcos.Pizarro@uspto.gov. If attempts to reach the examiner by telephone are unsuccessful, the examiner's supervisor, Wael Fahmy, can be reached on (571) 272-1705.

37. Any inquiry of a general nature or relating to the status of this application may be obtained from the Patent Application Information Retrieval (PAIR) system. Status information for published applications may be obtained from either Private PAIR or Public PAIR. Status information for unpublished applications is available through Private PAIR only. For more information about the PAIR system, see <http://pair-direct.uspto.gov>. Should you have questions on access to the Private PAIR system, contact the Electronic Business Center (EBC) at 866-217-9197 (toll-free).

Art Unit: 2814

38. The following list is the Examiner's field of search for the present Office Action:

Field of Search	Date
U.S. Class / Subclass(es): 257/335-343,409,487,488,491-493,659	5/20/2005
Other Documentation:	
Electronic Database(s): EAST (USPAT, EPO, JPO)	5/20/2005



Marcos D. Pizarro-Crespo
Patent Examiner
Art Unit 2814
571-272-1716
marcos.pizarro@uspto.gov

MDP/mdp
May 20, 2005

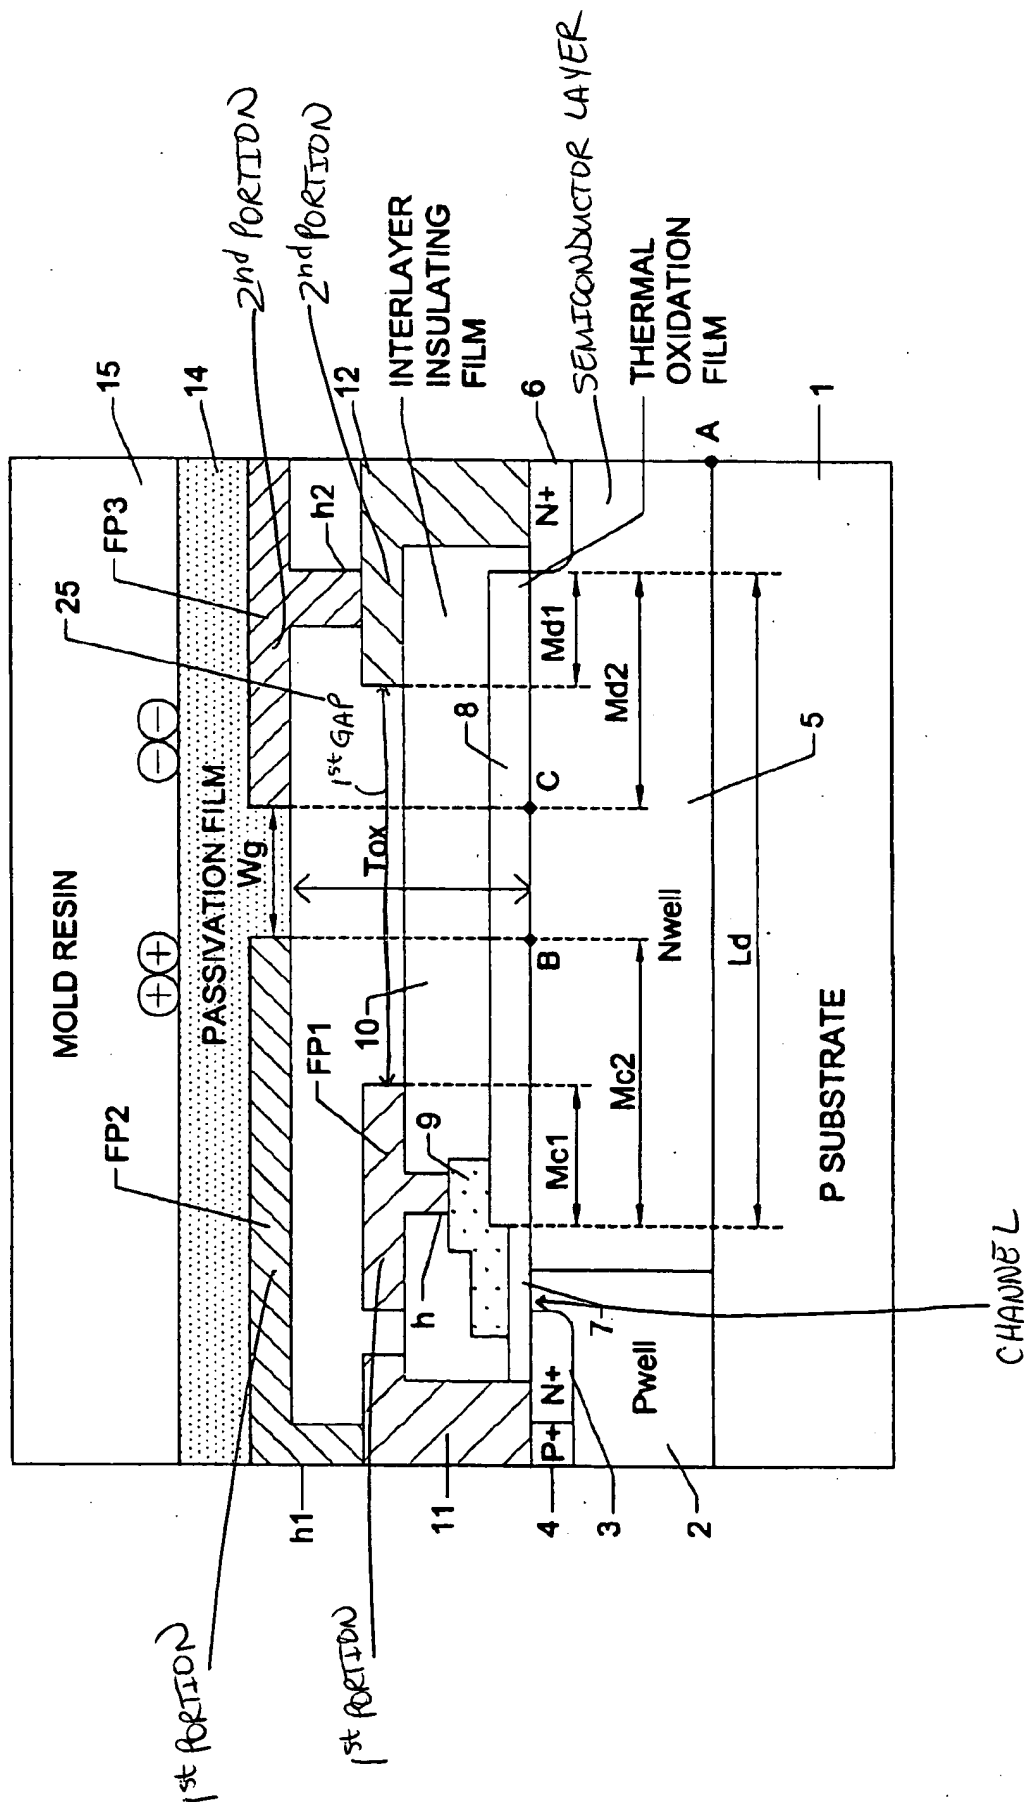


FIG. 19